

## STARPOINT eye nut VRM-M20

Artikel-Nr: 7990315




- Lifting points pivots 360° for an easy adjustment in load direction.
- Clear marking of the minimum WLL for all loading directions.
- The WLL statement corresponds to the minimum WLL in all loading directions. Higher WLL possible when location and installation is optimised (compare WLL chart).
- Available as: - Standard Metric Thread M6-M30 (DIN EN 13)
- Special coating on request.
- Component according to the test criterias of DGUV "GS-HM-36".
- Quick and easy installation with just one bolt connection.
- Hand tightening with appropriate wrench is sufficient for a singular lift.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## STARPOINT eye nut VRM-M20

Artikel-Nr: 7990315

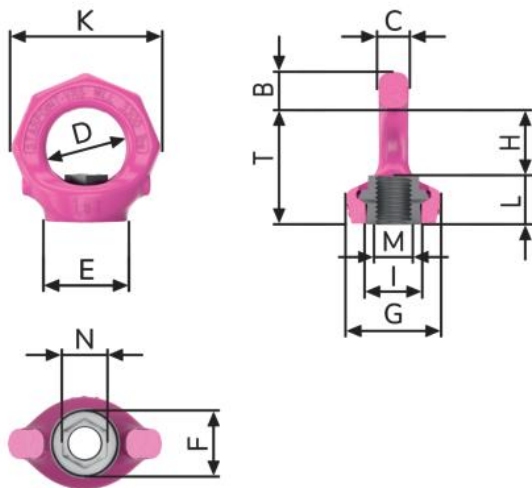

<b>weight</b>	0.48 kg	1.06 lbs
<b>Nominal WLL</b>	2300 kg	5070 lbs
<b>T</b>	58 mm	2-9/32"
<b>B</b>	17 mm	43/64"
<b>C</b>	16 mm	5/8"
<b>D</b>	40 mm	1-9/16"
<b>E</b>	41 mm	1-5/8"
<b>F</b>	37 mm	1-7/16"
<b>G</b>	50 mm	1-31/32"
<b>H</b>	35 mm	1-3/8"
<b>I</b>	29,3 mm	1-5/32"
<b>K</b>	76 mm	3"
<b>L</b>	23 mm	29/32"
<b>M</b>	M20 mm	M20
<b>N</b>	24 mm	15/16"