

## Load Ring VLBS-U-1,5t with spring

Artikel-Nr: 7993035




Universal Lifting point for welding with a diverse operating range in engineering and plant manufacturing.

- Suspension ring with optimised function form for a better support at side loading and protection of the clamping spring.
- Suspension ring pivots 180°.
- 100 % WLL at 90° in the load ring plane possible.
- Clamping spring works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lashing mean possible.
- Distance knobs at the weld-on block to achieve the necessary distance for the root weld.
- Clear marking of the minimum WLL for all loading directions.
- Simple and process safe positioning for the welding of pre-assembled components consisting of suspension ring and weld-on blocks. Weld: HV 5 + a 3
- The weld-on-block is made (forged) out of a good weldable steel.
- Tested and certified by DGUV, Testing specifications: GS-OA-15-04:2015-12, Certificate-No.: OA 1951043
- Significant product characteristics of the VLBS are subject to property right claims.
- Confirmation of the deep temperature ability to -40°C by the notch bar impact test is on request possible (before order is placed).

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## Load Ring VLBS-U-1,5t with spring

Artikel-Nr: 7993035

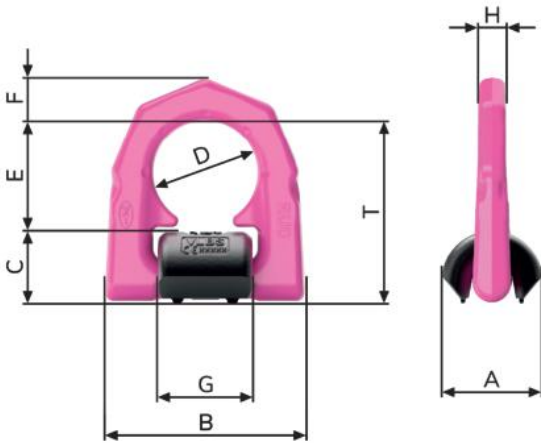

|                    |         |          |
|--------------------|---------|----------|
| <b>weight</b>      | 0.35 kg | 0.77 lbs |
| <b>Nominal WLL</b> | 1500 kg | 3300 lbs |
| <b>T</b>           | 65 mm   | 2-9/16"  |
| <b>A</b>           | 33 mm   | 1-5/16"  |
| <b>B</b>           | 66 mm   | 2-5/8"   |
| <b>C</b>           | 25 mm   | 63/64"   |
| <b>D</b>           | 38 mm   | 1-1/2"   |
| <b>E</b>           | 40 mm   | 1-9/16"  |
| <b>F</b>           | 14 mm   | 9/16"    |
| <b>G</b>           | 33 mm   | 1-5/16"  |
| <b>H</b>           | 14 mm   | 9/16"    |