

STARPOINT eye nut VRM-M24

Artikel-Nr: 7990316




- Lifting points pivots 360° for an easy adjustment in load direction.
- Clear marking of the minimum WLL for all loading directions.
- The WLL statement corresponds to the minimum WLL in all loading directions. Higher WLL possible when location and installation is optimised (compare WLL chart).
- Available as: - Standard Metric Thread M6-M30 (DIN EN 13)
- Special coating on request.
- Component according to the test criterias of DGUV "GS-HM-36".
- Quick and easy installation with just one bolt connection.
- Hand tightening with appropriate wrench is sufficient for a singular lift.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

STARPOINT eye nut VRM-M24

Artikel-Nr: 7990316

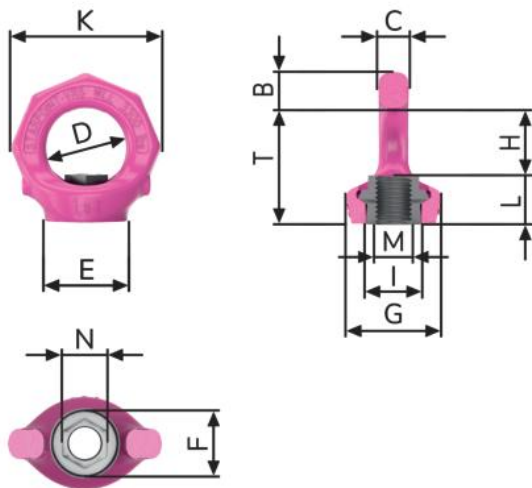

| | | |
|--------------------|---------|----------|
| weight | 0.83 kg | 1.83 lbs |
| Nominal WLL | 3200 kg | 7050 lbs |
| T | 70 mm | 2-3/4" |
| B | 20 mm | 3/4" |
| C | 19 mm | 3/4" |
| D | 49 mm | 1-15/16" |
| E | 51 mm | 2" |
| F | 45 mm | 1-25/32" |
| G | 60 mm | 2-3/8" |
| H | 41 mm | 1-5/8" |
| I | 35,2 mm | 1-3/8" |
| K | 92 mm | 3-5/8" |
| L | 29 mm | 1-5/32" |
| M | M24 mm | M24 |
| N | 30 mm | 1-3/16" |