

## STARPOINT eye nut VRM-M30

Artikel-Nr: 7993008




- Lifting points pivots 360° for an easy adjustment in load direction.
- Clear marking of the minimum WLL for all loading directions.
- The WLL statement corresponds to the minimum WLL in all loading directions. Higher WLL possible when location and installation is optimised (compare WLL chart).
- Available as: - Standard Metric Thread M6-M30 (DIN EN 13)
- Special coating on request.
- Component according to the test criterias of DGUV "GS-HM-36".
- Quick and easy installation with just one bolt connection.
- Hand tightening with appropriate wrench is sufficient for a singular lift.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## STARPOINT eye nut VRM-M30

Artikel-Nr: 7993008

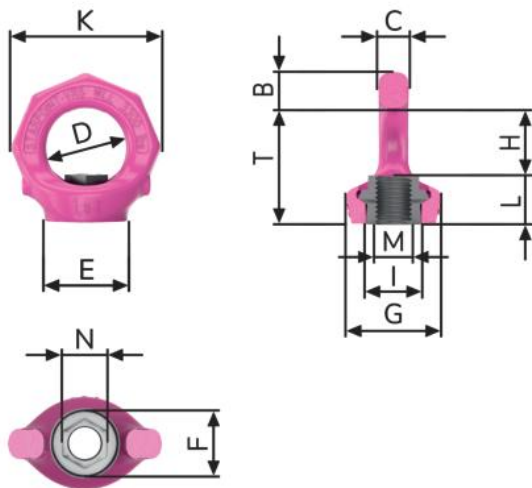

<b>weight</b>	1.32 kg	2.91 lbs
<b>Nominal WLL</b>	4500 kg	9920 lbs
<b>T</b>	87 mm	3-7/16"
<b>B</b>	26 mm	1"
<b>C</b>	24 mm	15/16"
<b>D</b>	60 mm	2-3/8"
<b>E</b>	66 mm	2-5/8"
<b>F</b>	56 mm	2-3/16"
<b>G</b>	75 mm	2-15/16"
<b>H</b>	51 mm	2"
<b>I</b>	44 mm	1-3/4"
<b>K</b>	114 mm	4-1/2"
<b>L</b>	36 mm	1-27/64"
<b>M</b>	M30 mm	M30
<b>N</b>	36 mm	1-27/64"