

Load Ring VRBS-FIX welded on boltable plate VRBG-FIX-100t

Artikel-Nr: 7912696




Load ring threaded with full working load in all directions and split force introduction.

- Split force introduction due to multiple point fixing.
- Suspension ring pivots 180°.
- 100% WLL at 90 degrees in the load ring plane possible.
- Clear marking of the minimum WLL for all loading directions.
- Patented markings for easy determination for withdraw of service.
- Original RUD bolt available as spare part.
- Component according to the test criterias of BG/DGUV "GS-HM 36".
- Assembly with allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift. Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Load Ring VRBS-FIX welded on boltable plate VRBG-FIX-100t

Artikel-Nr: 7912696

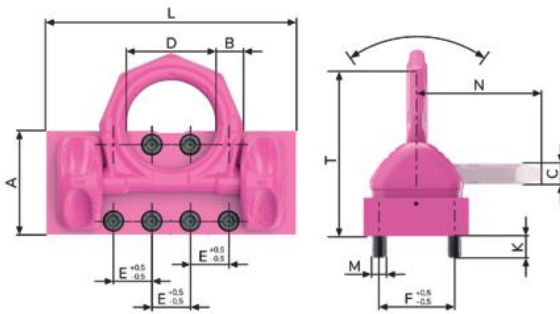

weight	441.96 kg	974.36 lbs
Nominal WLL	100000 kg	null
T	510 mm	20-1/16"
A	380 mm	15"
B	99 mm	3-7/8"
C	77 mm	3"-1/32"
D	250 mm	9-13/16"
E	100 mm	3-15/16"
F	240 mm	9-1/2"
K	79 mm	3-1/8"
L	825 mm	32-1/2"
M	M48 mm	M48
N	392 mm	15-7/16"