

## STARPOINT eye nut VRM-M8

Artikel-Nr: 7992989




- Lifting points pivots 360° for an easy adjustment in load direction.
- Clear marking of the minimum WLL for all loading directions.
- The WLL statement corresponds to the minimum WLL in all loading directions. Higher WLL possible when location and installation is optimised (compare WLL chart).
- Available as: - Standard Metric Thread M6-M30 (DIN EN 13)
- Special coating on request.
- Component according to the test criterias of DGUV "GS-HM-36".
- Quick and easy installation with just one bolt connection.
- Hand tightening with appropriate wrench is sufficient for a singular lift.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## STARPOINT eye nut VRM-M8

Artikel-Nr: 7992989

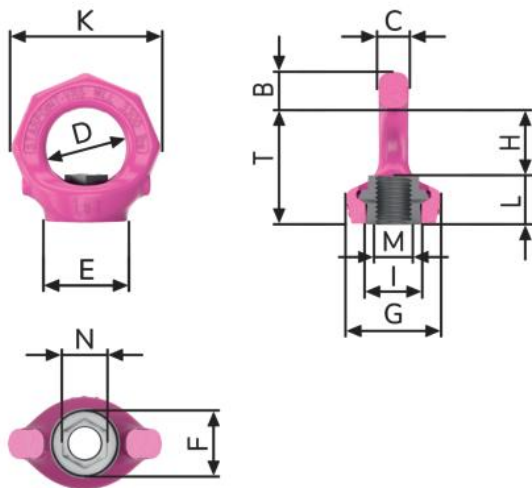

|                    |         |          |
|--------------------|---------|----------|
| <b>weight</b>      | 0.11 kg | 0.24 lbs |
| <b>Nominal WLL</b> | 300 kg  | 660 lbs  |
| <b>T</b>           | 35 mm   | 1-3/8"   |
| <b>B</b>           | 11 mm   | 7/16"    |
| <b>C</b>           | 9 mm    | 11/32"   |
| <b>D</b>           | 25 mm   | 63/64"   |
| <b>E</b>           | 25 mm   | 63/64"   |
| <b>F</b>           | 21 mm   | 13/16"   |
| <b>G</b>           | 30 mm   | 1-3/16"  |
| <b>H</b>           | 21 mm   | 13/16"   |
| <b>I</b>           | 16,3 mm | 41/64"   |
| <b>K</b>           | 47 mm   | 1-7/8"   |
| <b>L</b>           | 14 mm   | 9/16"    |
| <b>M</b>           | M8 mm   | M8       |
| <b>N</b>           | 12 mm   | 15/32"   |